




- Supports Intel 6th/7th/8th/9th Gen processor (LGA1151) with Intel H110 chipset
- SO-DIMM DDR4
- 1 x MSATA SSD slot, 1 x 2.5" SATA Port
- 10 x USB 2.0/3.0
- MINI PCIe WIFI/BT (Option)
- Displays: 1 x VGA, 1 x DP++
- PS/2, LPT, 4 COM
- Dual GbE Lan (Option)
- 12-19V DC in


Specifications

Processor System	CPU	Intel® Skylake/Kabylake-S LGA1151, TDP. 65W
	Chipset	INTEL H110 PCH
	BIOS	AMI UEFI BIOS
Graphics	Chipset	Intel HD Graphics
	VRAM	Max. 64GB
	Multi displays	Support Dual displays
Memory	Interface	1 x VGA, 1 x DP++
	Type	SO-DIMM DDR4-2400
Ethernet	Max	64GB
	Lan IC	1 x RTL8111 , Option 2 x RTL8111
	Interface	10/100/1000Mbps
Wireless	Connector	1 x RJ45
	Type	Wi-Fi/BT module
Storage	Interface	1 x MINI PCIe
	Type	SSD、HDD
IO Interface	Interface	1 x MSATA, 1 x SATA Port
	Rear panel	1 x VGA, 1 x DP++ 2 x USB 3.0 , 6 x USB2.0 1 x RJ45 (option 2 x RJ45) 2 x PS/2, 1 x PLT, 4 x COM 1 x DC Jack 2 x Wi-Fi/BT ANT (Option)
Software	Front panel	2 x 3.5mm Audio jack: 1 x MIC IN, 1 x Line out 2 x USB2.0 1 x Power button, Power LED
	OS Supports	WINDOW 7/WINDOWS 10/LINUX
Power	Watchdog	Support
	vPro/AMT	No support
	TPM	No support
Case	Power input	12~19V DC IN, 2.5/5.5 DC Jack , Max.120W
	Size	210 x 210 x 56 mm
Environment	Material	Plastic+Metal
	Operating Temp.	-0~45°C
	Operating Humidity	10%~90% non-condensing
	Storage Temp.	-20~70°C
	Operating Humidity	5%~95% non-condensing

View

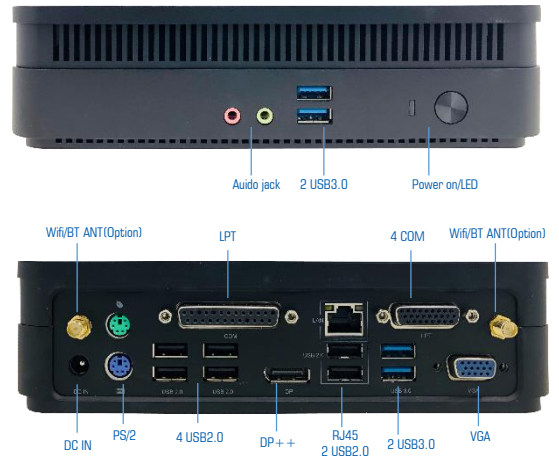

Size

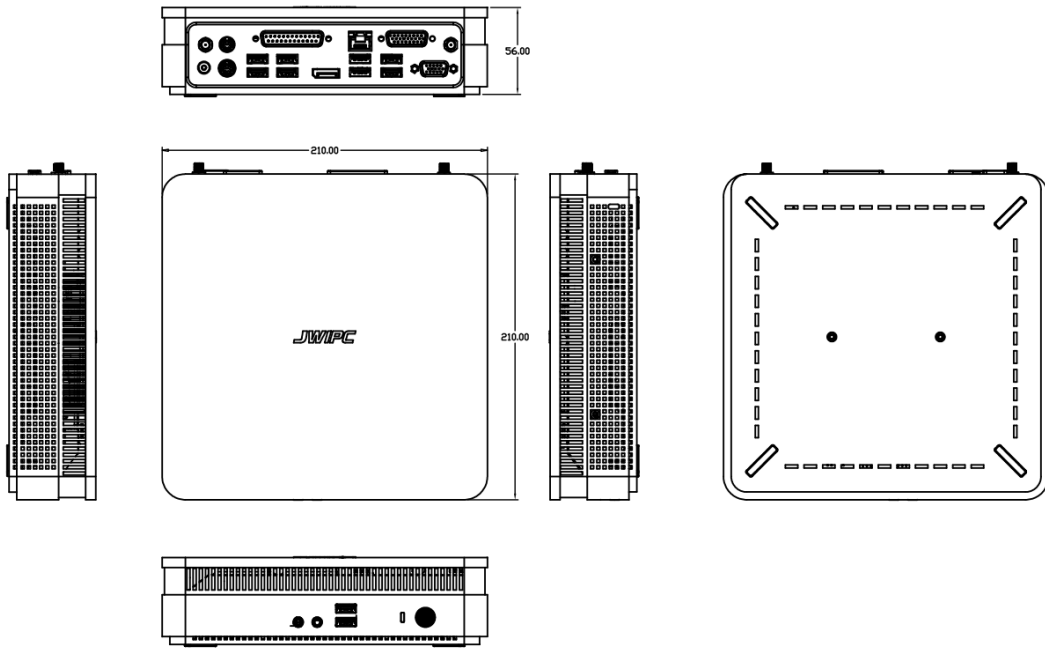

Information

Model	Description
C042K-1	I3-7100/128G SSD/4G DDR4/LPT/4 COM/1 LAN/ PS2
C042K-2	I3-7100/128G SSD/4G DDR4/LPT/4 COM/2 LAN

Product descriptions are subject to change without notice.