M134-C

Intel ARL-H MINI PC

Support Intel ARL-H Ultra 2th Gen processors, Support 4 Display, 2.5Gbps Lan, be widely used for Education, Digital signage，Conference Corporate.




- MINIPC Standard Module
- Intel ARL-H Processor
- 2 x SO-DIMM DDR5
- 2 x M.2 2280 KEY-M PCIE SSD
- 1 x M.2 2230 KEY-E for WIFI/BT
- 2 x Gigabit Lan (1G/2.5Gbps Optional)
- 3 x USB3.2
- 1 x HDMI, 1 xDP
- 1 x TYPE-C
- 1 x Thunderbolt4
- 19V 120W DC
- Support Window 11

01 Specifications


Processor System	CPU	Intel® ARL-H, TDP 65W 225H/255H/285H
	Chipset	SOC
	BIOS	AMI UEFI BIOS
Graphics	Multi displays	Support 4 display
	Interface	1 x HDMI, 1 x DP, 1 x Thunderbolt 4, 1 x TYPE-C
Memory	Type	2 x SO-DIMM DDR5 5600MHz
	Max	64GB
Ethernet	Lan IC	2 x RTL8125(Optional RTL8111K)
	Interface	2 x 2.5Gbps(Optional 1Gbps)
	Connector	2 x RJ45
Wireless	Type	M.2 2230 Standard Wi-Fi/BT module, Optional WiFi6E/WiFi7 module
	Interface	1 x M.2 KEY-E 2230
Storage	Type	SSD
	Interface	2 x M.2 2280 KEY-M, PCIE 4.0 x4
IO Interface	Front panel	1 x Power Button, 1 x 3.5mm Combo Audio Jack, 2 x USB3.2 Gen2 10Gbps, 1 x Thunderbolt 4 (Support 40Gbps, PD15W Output, DP Output Display 8K30Hz, PD IN 100W)
	Rear panel	1 x HDMI2.1 (8K60Hz), 1 x DP1.4 (8K60Hz), 2 x RJ45(1G/2.5G OPTIONAL), 1 x TYPE-C(Support 20Gbps, PD15W Output, DP Output Display 8K30Hz), 1 x USB3.2 Gen2 10Gbps, 1 x DC IN JACK, 1 x Kensington Lock
Software	OS Supports	WINDOWS 11
	TPM	Optional
Power	Power input	19V 120W DC
Size	Size	140.0 x 138.8 x 55.25 mm
Environment	Operating Temp.	-5~45℃
	Operating Hum.	10%~90% non-condensing
	Storage Temp.	-20~70℃
	Storage Hum.	5%~95% non-condensing

02 Product view


Front I/O

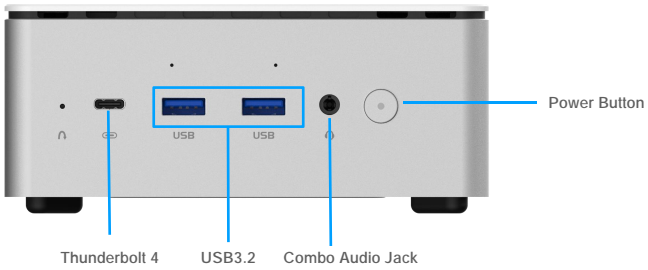

Rear I/O

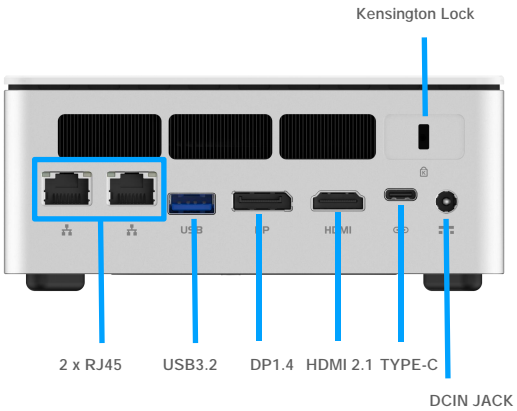

03 Dimensions

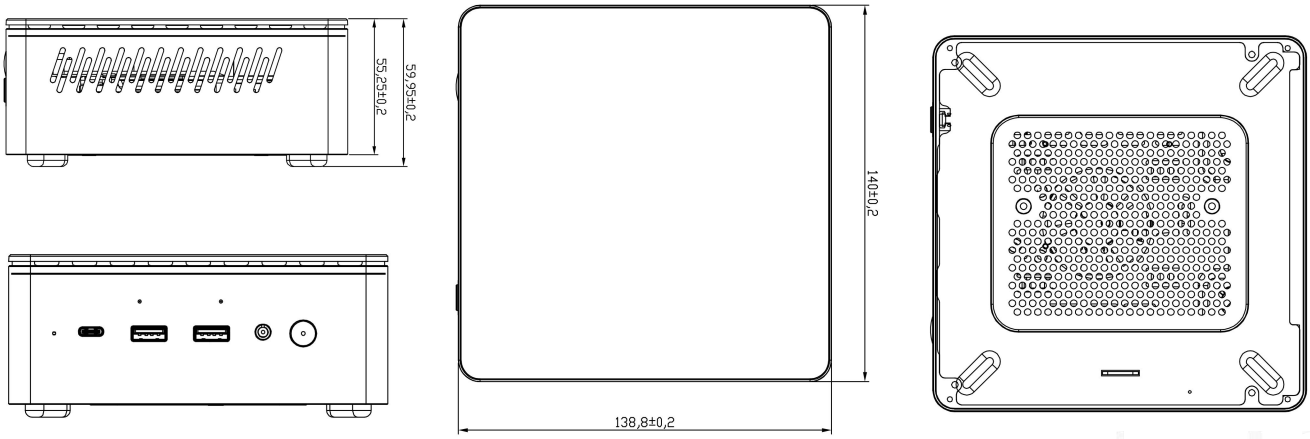

04 Product Selection

Model	Description
M134-C-225H	Intel® ARL-H 225H/3 x USB3.2/1 x Thunderbolt 4/1 x TYPE-C/1 x HDMI 2.1/1 x DP 1.4
M134-C-255H	Intel® ARL-H 255H/3 x USB3.2/1 x Thunderbolt 4/1 x TYPE-C/1 x HDMI 2.1/1 x DP 1.4
M134-C-285H	Intel® ARL-H 285H/3 x USB3.2/1 x Thunderbolt 4/1 x TYPE-C/1 x HDMI 2.1/1 x DP 1.4