




- Supports Intel 6th/7th/8th/9th Gen processor (LGA1151) with Intel H310C chipset
- SO-DIMM DDR4
- 1 x M.2 2280/2242 SSD slot, 1 x 2.5" SATA Port
- 8 x USB2.0/3.0
- M.2 2230 WIFI/BT (Option)
- Displays: 1 x HDMI
- 12-19V DC in


Specifications

Processor System	CPU	Intel® Sky lake/Kaby lake/Coffee lake-S LGA1151, TDP. 65W
	Chipset	INTEL H310C PCH
	BIOS	AMI UEFI BIOS
Graphics	Chipset	Intel UHD Graphics
	VRAM	Max. 64GB
	Multi displays	Support Dual displays
	Interface	1 x HDMI
Memory	Type	SO-DIMM DDR4-2400
	Max	64GB
Ethernet	Lan IC	1 x RTL8111
	Interface	10/100/1000Mbps
	Connector	1 x RJ45
Wireless	Type	Wi-Fi/BT module
	Interface	1 x M.2 2230
Storage	Type	SSD、HDD
	Interface	1 x M.2 2280, 1 x SATA Port
IO Interface	Rear panel	1 x HDMI 1 x DB-9,COM(RS232) 4 x USB 3.0 1 x RJ45 2 x 3.5mm Audio jack: 1 x MIC IN, 1 x Line out 1 x DC Jack 2 x Wi-Fi/BT ANT (Option)
	Front panel	2 x 3.5mm Audio jack: 1 x MIC IN, 1 x Line out 4 x USB2.0 1 x Power button, Power LED
Software	OS Supports	WINDOW 7/WINDOWS 10/LINUX
	Watchdog	No support
	vPro/AMT	No support
	TPM	No support
Power	Power input	12~19V DC IN, 2.5/5.5 DC Jack , Max.120W
Case	Size	210 x 210 x 56 mm
	Material	Plastic+Metal
Environment	Operating Temp.	-0~45°C
	Operating Humidity	10%~90% non-condensing
	Storage Temp.	-20~70°C
	Operating Humidity	5%~95% non-condensing

View

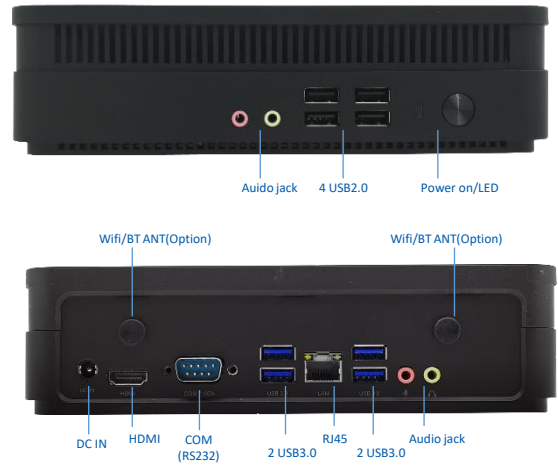

Size

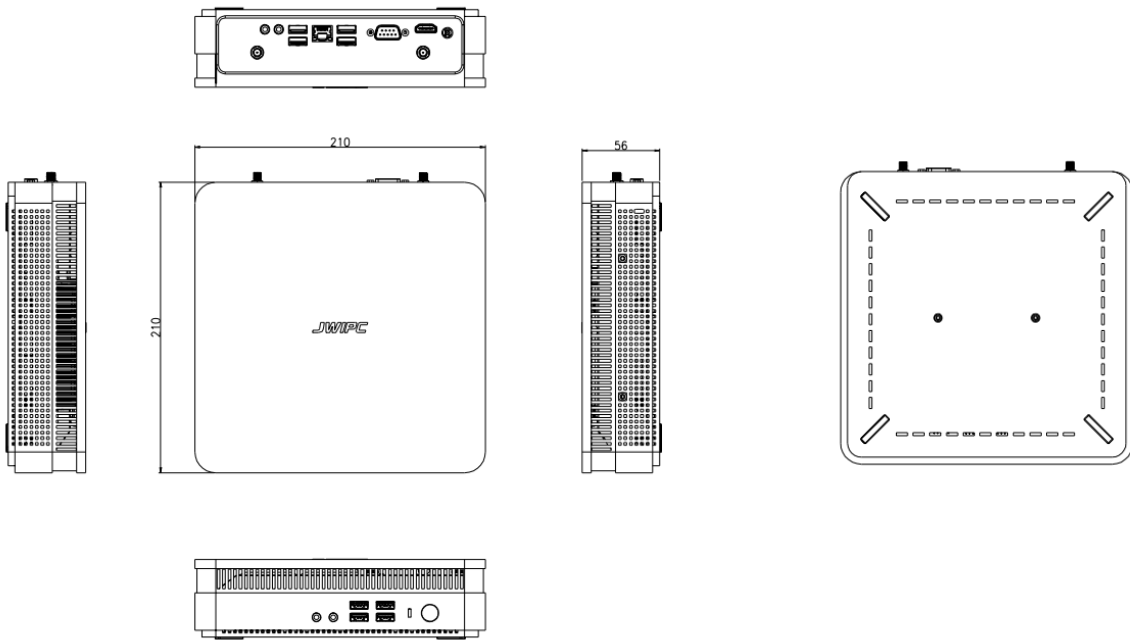

Information

Model	Description
C062-1	I3-8100/H310C Main board/128G SSD/4G DDR4/802.11AC WIFI+BT4.1

Product descriptions are subject to change without notice.