




- Supports Intel 10<sup>th</sup>/11<sup>th</sup> Gen processor (LGA1200) with Intel H510 chipset
- SO-DIMM DDR4
- 1 x M.2 2280 SSD slot, 1 x 2.5" SATA Port
- 8 x USB2.0/3.0
- M.2 2230 WIFI/BT (Option)
- Displays: 1 x HDMI; 1 x VGA
- 12-19V DC in


## Specifications

<b>Processor System</b>	CPU	Intel® Rocketlake-S/Comet Lake-S LGA1200, TDP. 65W
	Chipset	INTEL H510 PCH
	BIOS	AMI UEFI BIOS
<b>Graphics</b>	Chipset	Intel® Xe graphics architecture
	VRAM	Max. 50GB
	Multi displays	Support Dual displays
	Interface	1 x HDMI; 1 x VGA
<b>Memory</b>	Type	2 x SO-DIMM DDR4-2400
	Max	64GB
<b>Ethernet</b>	Lan IC	1 x RTL8111
	Interface	10/100/1000Mbps
	Connector	1 x RJ45
<b>Wireless</b>	Type	Wi-Fi/BT module
	Interface	1 x M.2 2230
<b>Storage</b>	Type	SSD, HDD
	Interface	1 x M.2 2280, 1 x SATA Port
<b>IO Interface</b>	Rear panel	1 x HDMI; 1 x VGA 1 x DB-9, COM(RS232)(可选) 4 x USB 3.0 1 x RJ45 2 x 3.5mm Audio jack: 1 x MIC IN, 1 x Line out 1 x DC Jack 2 x Wi-Fi/BT ANT (Option)
	Front panel	2 x 3.5mm Audio jack: 1 x MIC IN, 1 x Line out 4 x USB2.0 1 x Power button, Power LED
<b>Software</b>	OS Supports	WINDOW 7/WINDOWS 10/LINUX
	Watchdog	No support
	vPro/AMT	No support
	TPM	No support
<b>Power</b>	Power input	12~19V DC IN, 2.5/5.5 DC Jack, Max.120W
<b>Case</b>	Size	210 x 210 x 56 mm
	Material	Plastic+Metal
<b>Environment</b>	Operating Temp.	-0~45°C
	Operating Humidity	10%~90% non-condensing
	Storage Temp.	-20~70°C
	Operating Humidity	5%~95% non-condensing

## View

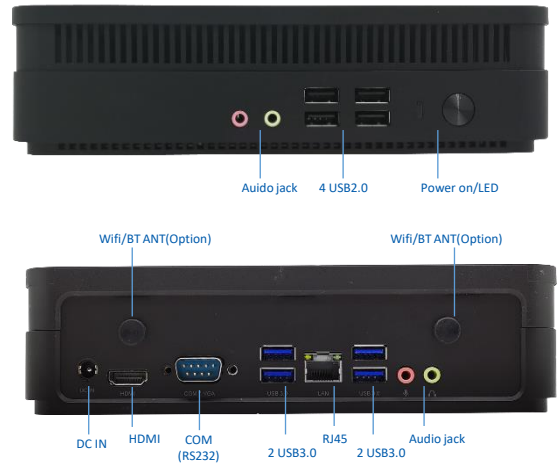

## Size

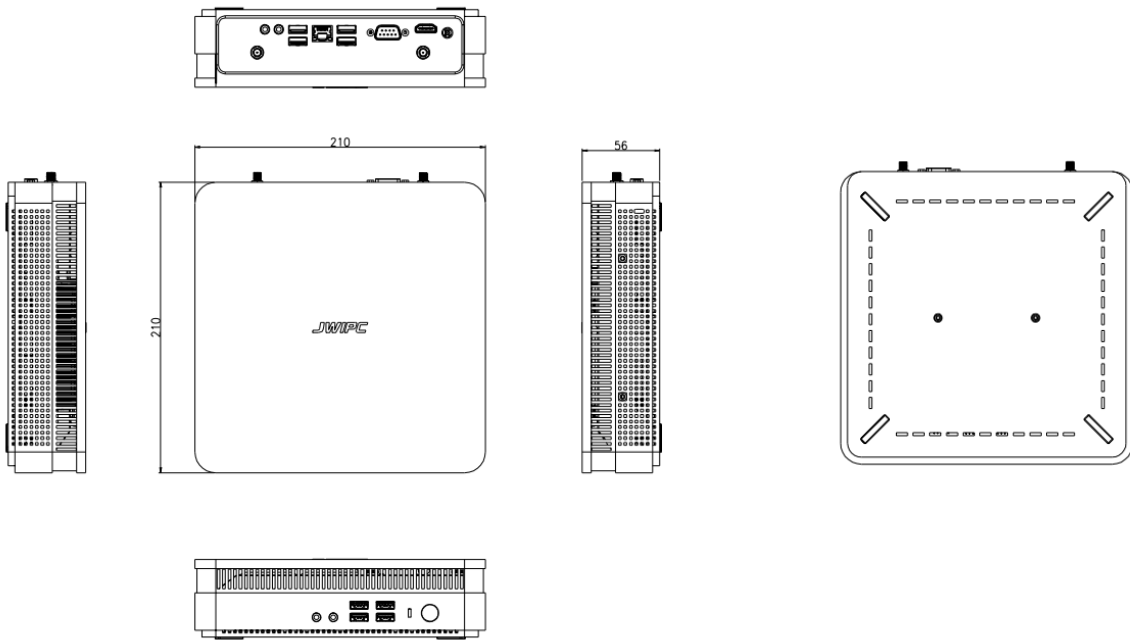

## Information

Model	Description
C092-L	I3-10105/H510 Main board/128G SSD/4G DDR4/802.11AC WIFI+BT4.1
C092-V	I5-10405/H510 Main board/512G SSD/8G DDR4/802.11AC WIFI+BT4.1

Product descriptions are subject to change without notice.