


- RK3568, Quad-core Cortex-A55 up to 2.0GHz
- Onboard LPDDR4/4X Memory
- Onboard eMMC Storage
- Onboard WIFI+BT
- Support HDMI/VGA display output
- 4 x USB 2.0, 2 x USB3.0
- Support 10/100/1000M LAN
- Support WOL, Watchdog, Timer Switch;
- Support Android 11; Linux (Debian 10.0)


主板规格简介

Processor	CPU	RK3568 Quad-core Cortex-A55 up to 2.0GHz
Display	GPU	ARM Mali-G52
	Interface	1 x HDMI Type-A 1 x VGA
Memory	Type	Option 1 / 2 / 4 GB, DDR4
System	OS	Android 11、Debian 10
Storage	Type	Onboard eMMC (Option 8G/16/32GB)
Audio	PMU	RK809-5 integrated audio
	Audio	1 x 3.5mm Line out interface 1 x 3.5mm Mic interface
Network	LAN	1 x 10/100/1000Mbps LAN
	WIFI	1 x M.2 2230 for Wifi+BT module (support WIFI6)
I/O	USB	2 x USB3.0, one OTG 4 x USB2.0
	others	1 x Power button 1 x Power LED
Power	Input	12V DC input
SIZE	L X H	118mm x 118mm
Environment	Operating Temperature	-5~50°C
	Operating Humidity	10%~90% Non-condensing
	Storage Temperature	-20~70°C
	Storage Humidity	5%~90% Non-condensing

产品图示

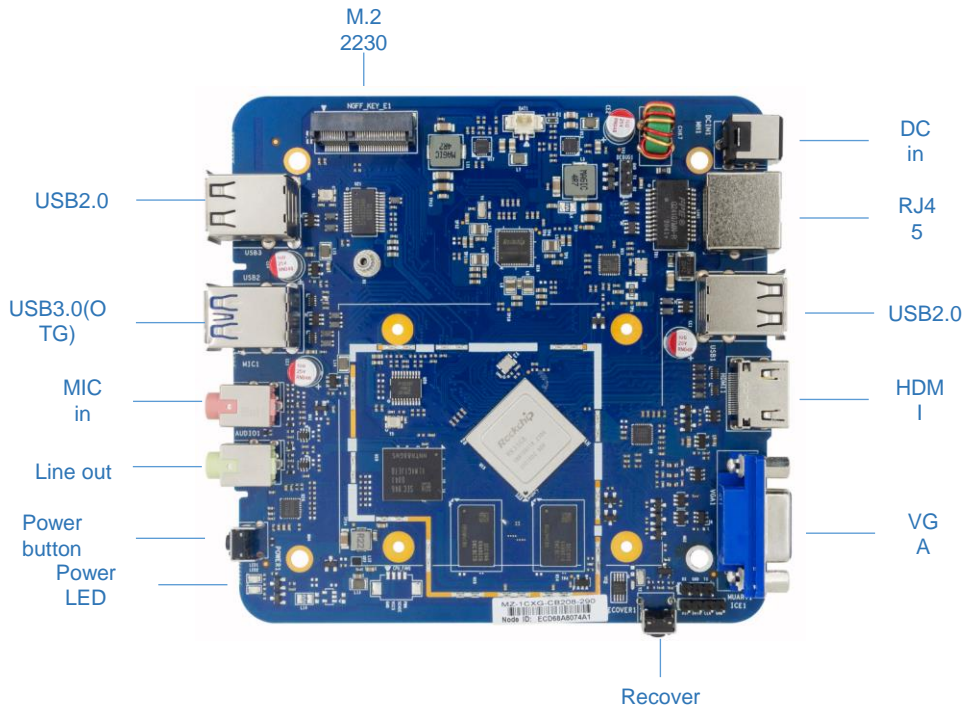

产品尺寸图

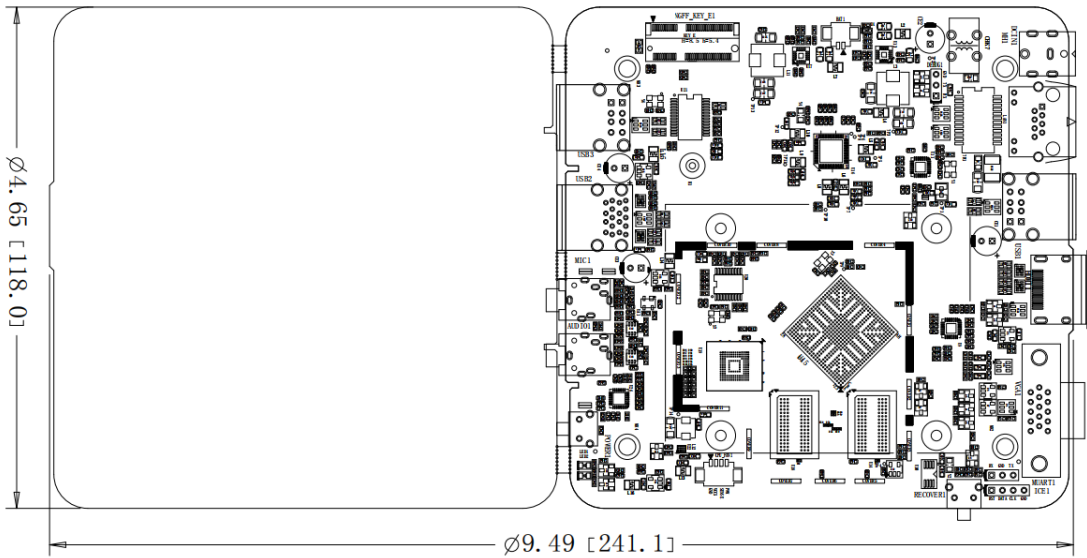

产品选型

Type	Description
R68T-V	RK3568/2G/16G
R28T-P	RK3568/4G/32G
R28T-L	RK3568/1G/8G

产品说明, 如有变更, 恕不另行通知