



# H115

Intel Twin Lake Platform



CPU	
CPU	Intel® Twin Lake N350/N150
TDP	6-15 W

Display	
Graphics card	Intel® UHD Graphics
Multi displays	Support triple display
Interface	3 x HDMI-Out 4K@30Hz

System	
Memory	Single SoDIMM DDR4 Max. 16 GB
Storage	1* M.2 Key M 2280 NVMe/SATA SSD
OS	Window11/Windows10/Linux
Watchdog	Support
Auto Power On	Yes
RTC	Power On/Off at specific time, a week as a cycle
Power Input	12V 2.5/5.5 DC-In
Dimension	199(L) x 152(W) x 30(H) mm
Operating Temp.	-5~45°C
Operating Humidity	10%~90% non-condensing
Storage Temp.	-20~70°C
Storage Humidity	5%~95% non-condensing


Network	
LAN IC	2 x LAN IC RTL8111H
LAN Interface	10/100/1000Mbps
LAN Connector	2 x RJ45 Ports
Wireless Type	M.2 Key E 2230 Module
Wireless Interface	WiFi/BT Module Intel AX101
4G/5G	Optional

I/O interface	
Serial Port	2 x RS232 COM1/2 (optional) 1 x COM3 (RS232) 1 x COM4 (RS232/RS422/RS485)
USB	3 x USB3.0, 2 x USB2.0 1 x Type-C
Button	1 x Power Button, 1 x Reset Button
SIM Card	1 x SIM card slot/e-SIM module (optional)
Audio	1 x Line-out, 1 x Mic-in
Power	1 x 2.5/5.5 DC-IN


Based on Intel Twin Lake Platform design, JWIPC H115 is a cost-efficient, Intel-powered, versatile fanless Mini PC designed for vending machine, an ideal Digital Signage, KIOSK and Bank Information Release solution.

## DIMENSIONS


(All dimensions in mm)

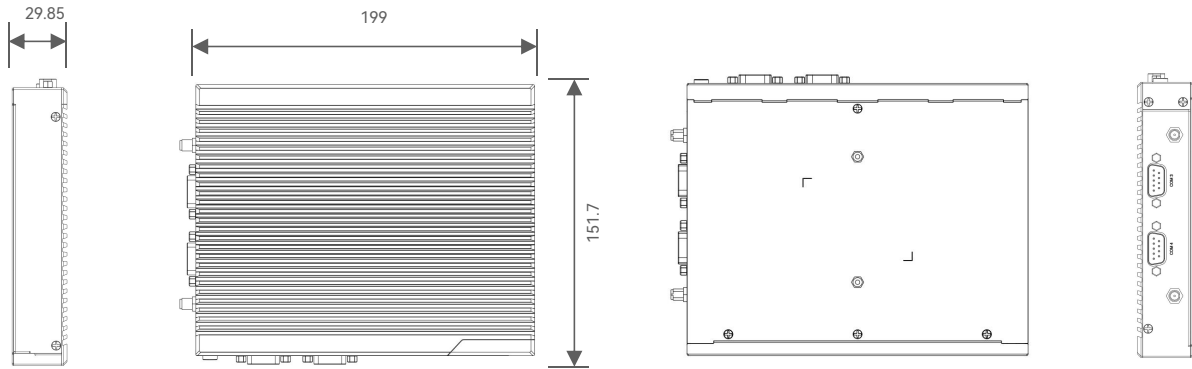

## I/O VIEW

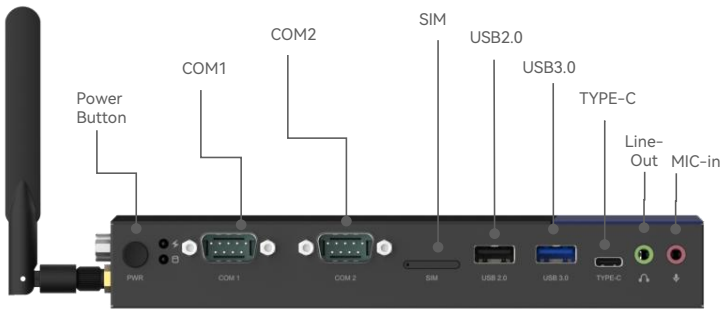

FRONT

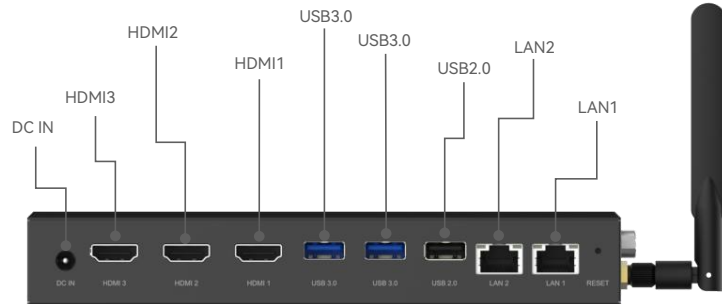

REAR



LEFT

MODEL	DESCRIPTION
H115-A	Intel I3-N350 /DDR4 8GB/128GB SSD/2* RJ45/3* HDMI-Out/Intel AX101 WiFi 3* USB3.0/2* USB2.0/Type-C/TPM2.0
H115-B	Intel N150 /DDR4 8GB/128GB SSD/2* RJ45/3* HDMI-Out/Intel AX101 WiFi 3* USB3.0/2* USB2.0/Type-C/ TPM2.0

SPECIES	PACKAGE LIST
Adapter	Power Adapter with multi countries plugs (UK/US/EU)
Antenna	x 2
User Manual	x 1 (English)

RoHS